STCM 多支裝彈簧式濾芯機

Spring Type Multi-Cartridges Filter Housing




設計壓力 Design P.	10 kg/cm²	操作壓力 Operating P.	7 kg/cm²
設計溫度 Design T.	100℃	操作溫度 Operating T.	75℃
選購配件 Accessory	各式濾心 Cartridges	選購配件 Accessory	中間隔板 Partition Plate

註：依需求可訂製耐高溫、高壓、夾套保溫型濾桶

Avaliable for customize filter housing,such as fit for high temperature,high pressure and jacket type.



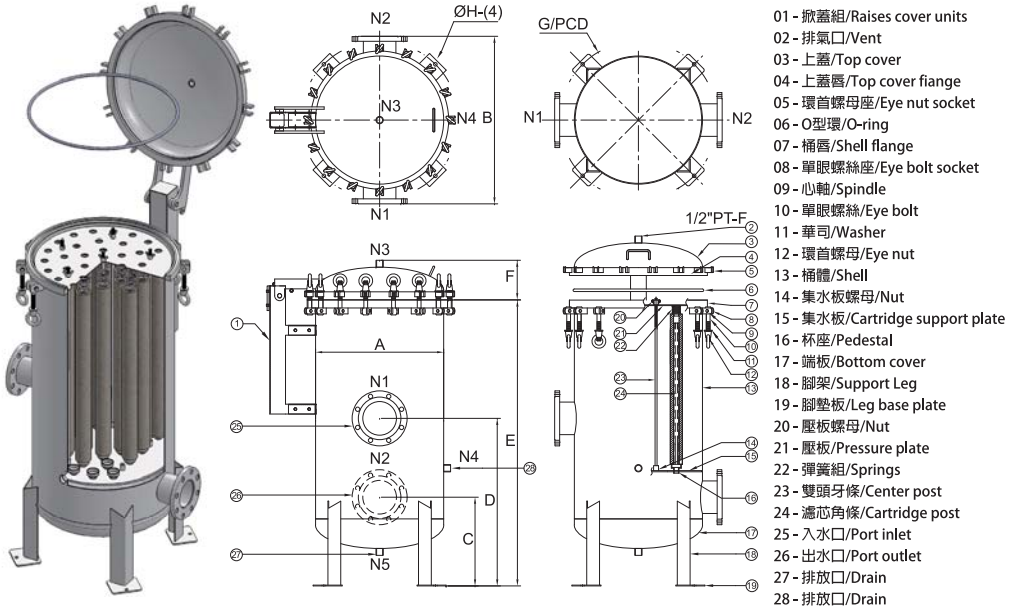

01 - 掀蓋組/Raises cover units
02 - 排氣口/Vent
03 - 上蓋/Top cover
04 - 上蓋唇/Top cover fiange
05 - 環首螺母座/Eye nut socket
06 - O型環/O-ring
07 - 桶唇/Shell flange
08 - 單眼螺絲座/Eye bolt socket
09 - 心軸/Spindle
10 - 單眼螺絲/Eye bolt
11 - 華司/Washer
12 - 環首螺母/Eye nut
13 - 桶體/Shell
14 - 集水板螺母/Nut
15 - 集水板/Cartridge support plate
16 - 杯座/Pedestal
17 - 端板/Bottom cover
18 - 腳架/Support Leg
19 - 腳墊板/Leg base plate
20 - 壓板螺母/Nut
21 - 壓板/Pressure plate
22 - 彈簧組/Springs
23 - 雙頭牙條/Center post
24 - 濾芯角條/Cartridge post
25 - 入水口/Port inlet
26 - 出水口/Port outlet
27 - 排放口/Drain
28 - 排放口/Drain

型式 Model	Length of Cartridge	N1/N2	N4/N5	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	G/PCD m/m	H m/m	M³/Hr	加侖 GPM/分	重量 weight	容量 Volume
13-20	30"	2"- 4"F	1"PT-F	Ø406	606	350	700	1320	141	Ø516	Ø14	39-60	195-300	105kg	165L
	40"	2"- 4"F	1"PT-F	Ø406	606	350	700	1570	141	Ø516	Ø14	52-80	260-400	125kg	198L
21-28	30"	3"- 4"F	1"PT-F	Ø486	686	350	700	1320	156	Ø596	Ø14	63-84	315-420	120kg	239L
	40"	3"- 4"F	1"PT-F	Ø486	686	350	700	1570	156	Ø596	Ø14	84-112	420-560	145kg	286L
29-40	30"	3"- 4"F	1"PT-F	Ø560	760	350	700	1320	171	Ø704	Ø18	87-108	435-540	190kg	327L
	40"	3"- 4"F	1"PT-F	Ø560	760	350	700	1570	171	Ø704	Ø18	116-138	580-720	225kg	389L
41-52	30"	4"- 6"F	1"PT-F	Ø600	800	400	800	1400	189	Ø744	Ø18	111-138	555-690	200kg	401L
	40"	4"- 6"F	1"PT-F	Ø600	800	400	800	1650	189	Ø744	Ø18	148-184	740-920	230kg	460L
53-57	30"	4"- 6"F	1"PT-F	Ø650	850	450	850	1450	198	Ø794	Ø18	141-168	705-840	242kg	484L
	40"	4"- 6"F	1"PT-F	Ø650	850	450	850	1700	198	Ø794	Ø18	188-224	940-1120	280kg	567L
58-82	30"	4"- 6"F	11/2"PT-F	Ø762	962	500	950	1500	221	Ø962	Ø19	171-243	855-1215	365kg	665L
	40"	4"- 6"F	11/2"PT-F	Ø762	962	500	950	1750	221	Ø962	Ø19	228-324	1140-1620	408kg	802L

產品訂購編號

STCM 產品代碼 Product Code

4 材質 Material
- 4 – 304
- 6 – 316
- 6L – 316L

10K 出入口類型 In & Outlet Type
- 10K – JIS
- 150 P – ANSI
- PN10 – DIN
- JF – Clamp
- PF – PTF
- BF – BSPF
- NF – NPTF

80 出入口規格 In & Outlet Size
- 50-2"
- 65-2-1/2"
- 80-3"
- 90-3-1/2"
- 100-4"
- 125-5"
- 150-6"
- 200-8"
- 250-10"
- 300-12"

E O型環材質 O-ring Material
- E – EPDM
- V – Viton
- N – NBR
- S – Silicone
- TS – Teflon + Silicone

13 濾芯支數 QTY of Cartridge
- 13 – 218

30 濾芯尺寸 Length of Cartridge
- 30 – 30"
- 40 – 40"

MF 濾芯 Cartridge
- MF – DOE
- M5 – 222
- M7 – 226

A 內表面處理 Interior surface finished
- A –酸洗 ACID-Washing
- B –電解 Electrolyze
- C–拋光 Polishing

B 外表面處理 Exterior surface finished
- A –酸洗 ACID-Washing
- B –電解 Electrolyze
- C–拋光 Polishing