TBF 上入型袋濾機
Top-Loading Bag Filter Housing




設計壓力 Design P.	15 kg/cm²	操作壓力 Operating P.	10 kg/cm²
設計溫度 Design T.	100℃	操作溫度 Operating T.	75℃
選購配件 Accessory	各式濾袋、濾袋撐開架、金屬浮球 Filter bag. Bag pressing. Metal float ball		










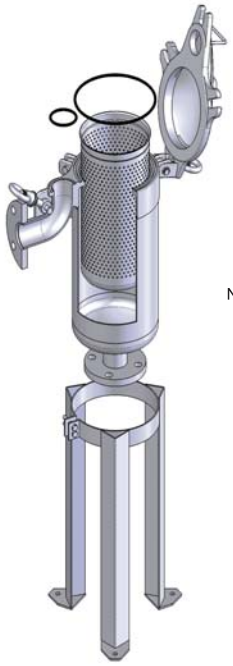

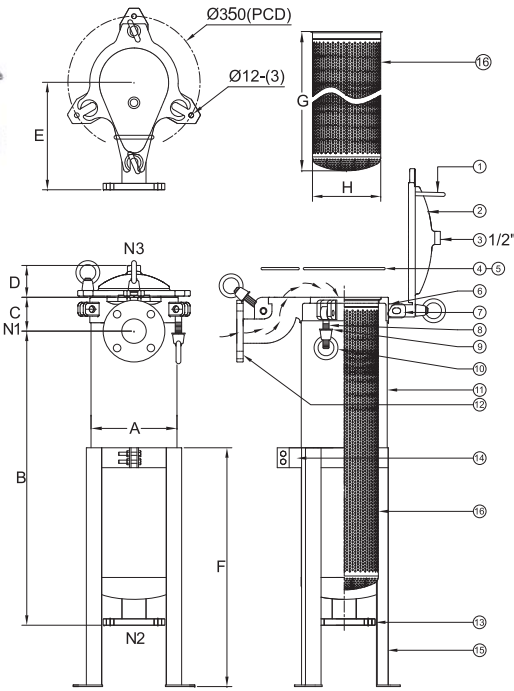

01 - 把手/Handle
02 - 上蓋/Top cover
03 - 排氣口/Vent
04 - O型環/O-ring
05 - O型環/O-ring
06 - 桶唇/Shell flange
07 - 心軸/Spindle
08 - 單眼螺絲/Eye bolt
09 - 華司/Washer
10 - 環首螺母/Eye nut
11 - 桶體/Shell
12 - 入水口/Port inlet
13 - 出水口/Port outlet
14 - 腳架螺絲/Bolt
15 - 活動腳架/Support Leg
16 - 金屬內網/Basket

型式 Model	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	G m/m	H m/m	M³/Hr	GPM	重量 weight	容量 Volume
TBF-B1	Ø216	390	85	80	270	600	350	Ø171.5	20	90	40kg	16L
TBF-B2	Ø216	740	85	80	270	600	730	Ø171.5	45	200	48kg	31L

適用2"入口徑規格，其他入口徑規格需配合轉接頭
For 2" Inlet diameter specification. The other inlet/outlet types need use transfer adaptor.

產品訂購編號

TBF 產品代碼 Product Code

4 材質 Material
- 4 – 304
- 6 – 316
- 6L – 316L

10K 出入口類型 In & Outlet Type
- 10K – JIS
- 150 P – ANSI
- PN10 – DIN
- J – Clamp
- PF – PTF
- BF – BSPF
- NF – NPTF

25 出入口規格 In & Outlet Size
- 25 – 1"
- 40 – 1-1/2"
- 50 – 2"
- 65 – 2-1/2"
- 80 – 3"

B1 濾袋尺寸 Length of Bag
- B1 - No.1 Bag
- B2 - No.2 Bag

E O型環材質 O-ring Material
- E – EPDM
- V – Viton
- N – NBR
- S – Silicone
- TS – Teflon + Silicone

A 內表面處理 Interior surface finished
- A–酸洗 ACID-Washing
- B–電解 Electrolyze
- C–拋光 Polishing

B 外表面處理 Exterior surface finished
- A–酸洗 ACID-Washing
- B–電解 Electrolyze
- C–拋光 Polishing