SCFH 單支裝濾芯機
Single Cartridge Filter Housing




設計壓力 Design P.	10 kg/cm²	操作壓力 Operating P.	7 kg/cm²
設計溫度 Design T.	100℃	操作溫度 Operating T.	75℃
選購配件 Accessory	各式濾心 Cartridges		










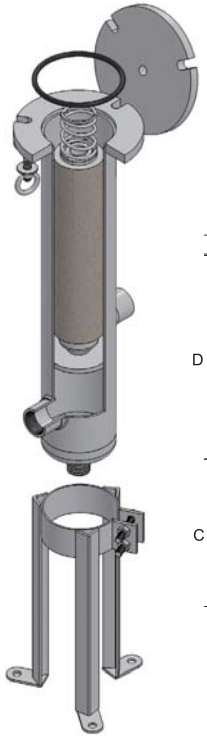

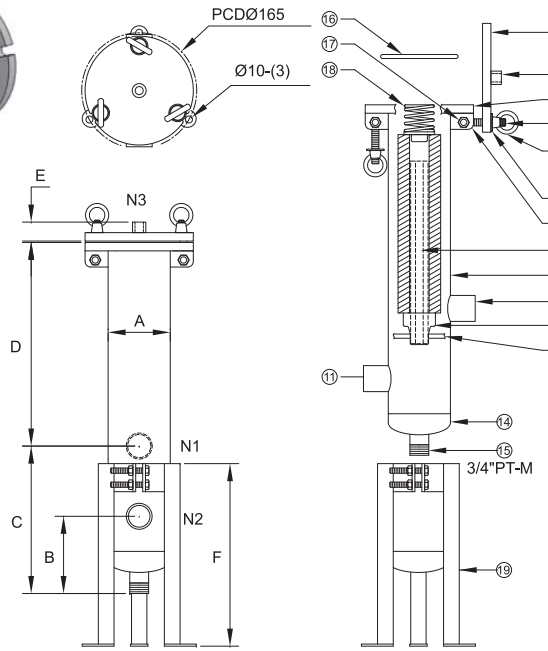

01 - 上蓋/Top cover
02 - 排氣口/Vent
03 - 桶唇/Shell flange
04 - 單眼螺絲/Eye bolt
05 - 環首螺母/Eye nut
06 - 華司/Washer
07 - 單眼螺絲座/Eye bolt socket
08 - 濾芯角條/Cartridge post
09 - 桶體/Shell
10 - 入水口/Port inlet
11 - 出水口/Port outlet
12 - 杯座/Pedestal
13 - 集水板/Cartridge support plate
14 - 端板/Bottom cover
15 - 排放口/Drain
16 - O型環/O-ring
17 - 心軸/Spindle
18 - 彈簧組/Springs
19 - 腳架/Support Leg

型式 Model	Length of Cartridge	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	M³/Hr	GPM	重量 weight
SCFH10	10"	Ø89	105	210	290	26	265	1	5	12.5kg
SCFH20	20"	Ø89	105	210	540	26	265	2	10	16kg
SCFH30	30"	Ø89	105	210	790	26	265	3	15	19.5kg

濾芯僅供選購
Filter element for optional purchase.

產品訂購編號

SCFH	4	PF	25	E	10	MF	A	B
產品代碼 Product Code	材質 Material	出入口類型 In & Outlet Type	出入口規格 In & Outlet Size	O型環材質 O-ring Material	濾芯尺寸 Length of Cartridge	濾芯 Cartridge	內表面處理 Interior surface finished	外表面處理 Exterior surface finished
	4 – 304 6 – 316 6L – 316L	10K – JIS 150P – ANSI PN10 – DIN J – Clamp PF – PTF BF – BSPF NF – NPTF PM – PTM BM – BSPM NM – NPTM	15 – 1/2" 20 – 3/4" 25 – 1" 40 – 1-1/2" 50 – 2" 65 – 2-1/2"	E – EPDM V – Viton N – NBR S – Silicone TS – Teflon + Silicone	10 – 10" 20 – 20" 30 – 30"	MF – DOE MS – 222 M7 – 226	A –酸洗 ACID-Washing B –電解 Electrolyze C–拋光 Polishing	A –酸洗 ACID-Washing B –電解 Electrolyze C–拋光 Polishing