HPB 高壓型袋濾機
High Pressure Bag Filter Housing



設計壓力 Design P.	15 kg/cm²	操作壓力 Operating P.	10 kg/cm²
設計溫度 Design T.	100℃	操作溫度 Operating T.	75℃
選購配件 Accessory	各式濾袋、壓袋器、濾袋撐開架、金屬浮球 Filter bag. Bag pressing. Bag bracket. Metal float ball		












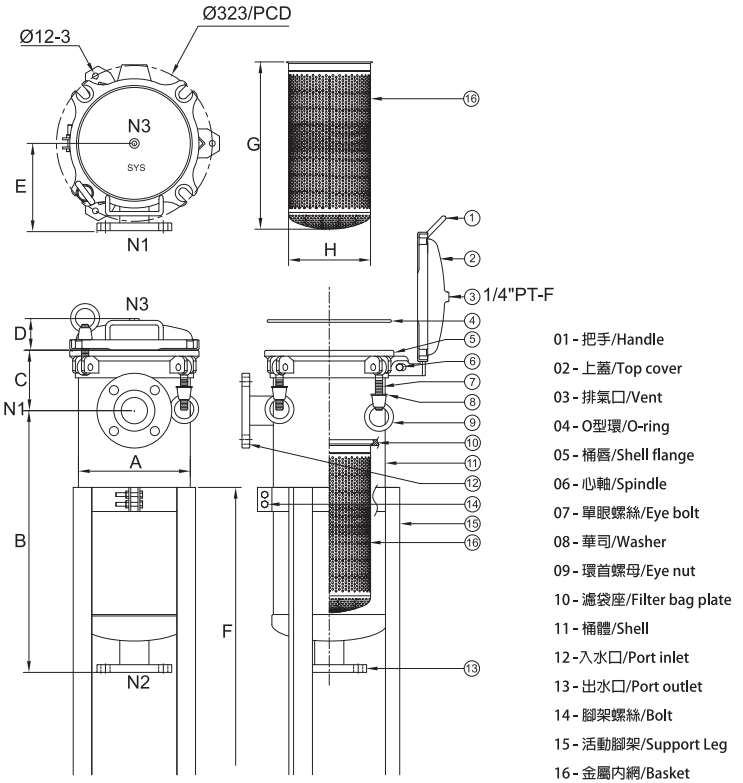

01 - 把手/Handle
02 - 上蓋/Top cover
03 - 排氣口/Vent
04 - O型環/O-ring
05 - 桶唇/Shell flange
06 - 心軸/Spindle
07 - 單眼螺絲/Eye bolt
08 - 華司/Washer
09 - 環首螺母/Eye nut
10 - 濾袋座/Filter bag plate
11 - 桶體/Shell
12 - 入水口/Port inlet
13 - 出水口/Port outlet
14 - 腳架螺絲/Bolt
15 - 活動腳架/Support Leg
16 - 金屬內網/Basket

型式 Model	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	G m/m	H m/m	M³/Hr	GPM	重量 weight	容量 Volume
HPB-B1	Ø232	545	125	65	176	600	350	Ø171.5	20	90	34kg	23L
HPB-B2	Ø232	925	125	65	176	600	730	Ø171.5	45	200	43kg	37L

產品訂購編號

HPB	4	SB	10K	50	B1	E	A	B
產品代碼 Product Code	材質 Material	出入口方式 In & Outlet	出入口類型 In & Outlet Type	出入口規格 In & Outlet Size	濾袋尺寸 Length of Bag	O型環材質 O-ring Material	內表面處理 Interior surface finished	外表面處理 Exterior surface finished
	4 – 304 6 – 316 6L – 316L	SS – 側進側出 Side In & Out SB – 側進底出 Side In & Bottom Out	10K – JIS 150 P – ANSI PN10 – DIN J – Clamp PF – PTF BF – BSPF NF – NPTF	15 – 1/2" 20 – 3/4" 25 – 1" 40 – 1-1/2" 50 – 2" 65 – 2-1/2" 80 – 3"	B1 - No.1 Bag B2 - No.2 Bag	E – EPDM V – Viton N – NBR S – Silicone TS – Teflon + Silicone	A–酸洗 ACID-Washing B–電解 Electrolyze C–拋光 Polishing	A–酸洗 ACID-Washing B–電解 Electrolyze C–拋光 Polishing